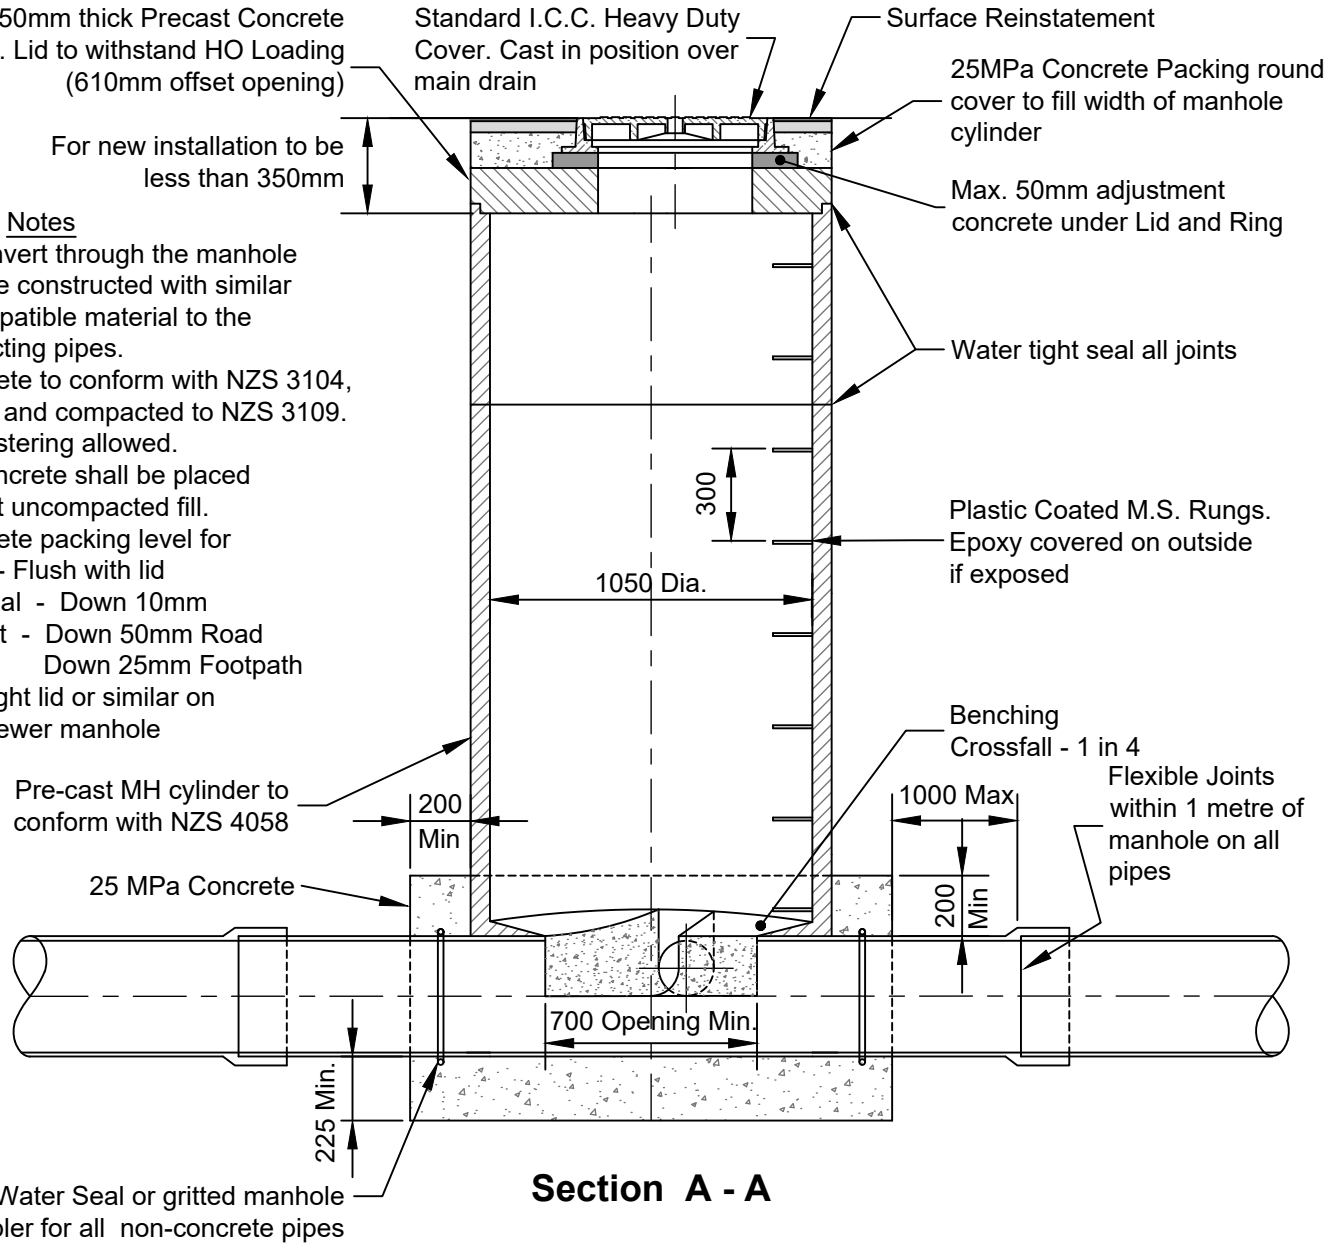

Notes

1. Pipe invert through the manhole shall be constructed with similar or compatible material to the connecting pipes.
2. Concrete to conform with NZS 3104, placed and compacted to NZS 3109. No plastering allowed.
3. No concrete shall be placed against uncompacted fill.
4. Concrete packing level for
   Grass - Flush with lid
   Chipseal - Down 10mm
   Asphalt - Down 50mm Road
   Down 25mm Footpath
5. Gas tight lid or similar on Foul Sewer manhole

Section A - A

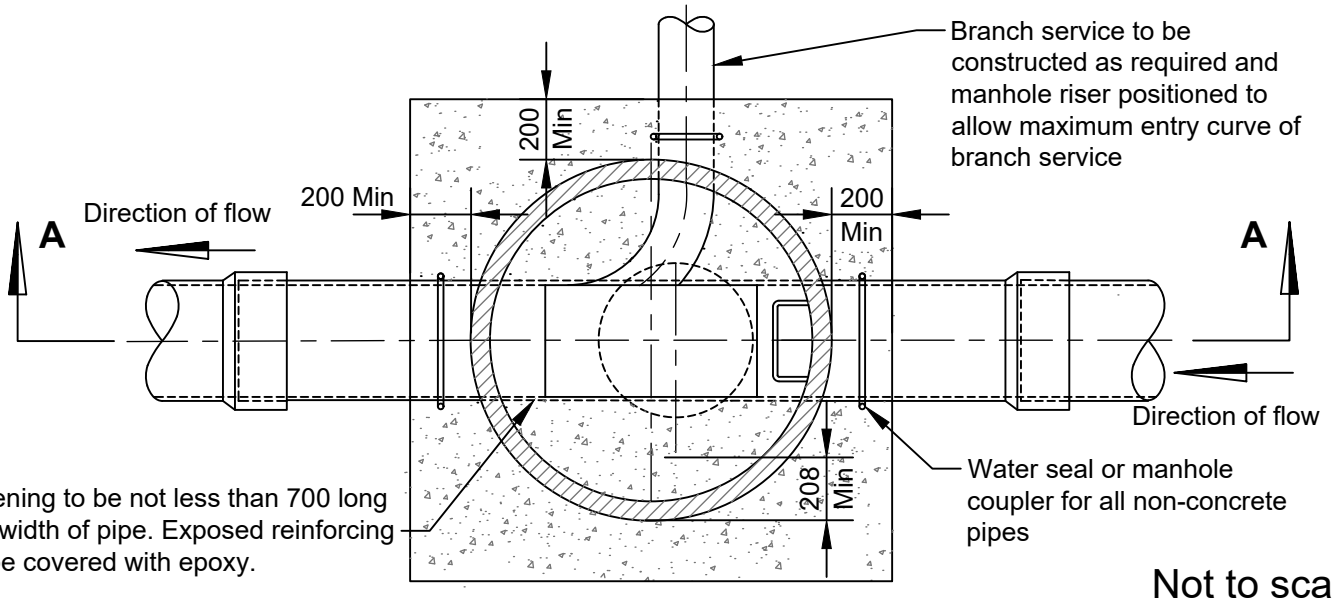

Not to scale

STANDARD CONCRETE MANHOLE
Ø150 TO Ø675 MAINS

Fig. D15
Rev. 5
Date 03/23